

# Decorative Metal Wiring Accessories

---





## Decorative Metal Wiring Accessories in Assorted Plate Finishes

A comprehensive range of decorative metal wiring accessories are available under the single Deco® brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

Deco® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated modules brochure can therefore be used in any combination on Deco® accessories.

Deco® plates are manufactured from stainless steel. All Deco® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.



## 20 Year Warranty

All Deco® products are covered by our 20 year warranty against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

All Deco® products featured on the following pages of this catalogue are available in 10 distinctive quality finishes.

All Deco® products are available with black or white inserts.

*(Excluding Antique Brass, Black Nickel, Matt Black & Matt Bronze finishes which are supplied with Black Insert and Gasket only).*

A selection of Stainless Steel and Satin Chrome finishes are available with grey inserts.



Antique Brass\*  
(AB)




Black Nickel  
(BN)



Polished Chrome  
(CH)




Stainless Steel  
(SS)



Satin Brass\*  
(SB)



Pearl Nickel  
(PN)



Polished Brass  
(BR)



Satin Chrome\*  
(SC)



Matt Black (MB)  
(Ingot Only)



Matt Bronze (BZ)  
(Ingot Only)

## Deco® unique product codes

When ordering any Deco® products, please specify the required finish by following the simple code structure as demonstrated here.



Plate Style   Product Finish   Product Number   Insert Colour

## Contents

|                              |     |
|------------------------------|-----|
| Switches                     | C4  |
| Unfurnished Plates           | C7  |
| Yokes & Back Boxes           | C9  |
| Dimmer Switches              | C10 |
| Toggle Switches              | C12 |
| Power Sockets                | C13 |
| Fused Connection Units       | C18 |
| Control Switches             | C20 |
| Shaver Socket & Blank Plates | C25 |
| TV, Telephone & Satellite    | C26 |
| New Media™ Plates            | C29 |
| Back Boxes & Fixing Screws   | C31 |

# Switches

Please see page J18 for a selection of MiniGrid® modules.

**MINIGRID®**

All Deco® switches are supplied complete with switch module(s). However the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

All Deco® switch plates are modular as standard, allowing you to create virtually any switch plate you require. A comprehensive range of available modules is illustrated in the MiniGrid® section of this catalogue.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.

## Switches

deco®

C5



O11 | O25



O12



O13



O19



105

**MINIGRID®**

Switch modules interchangeable with MiniGrid® Modules

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

### Plates Switches - MiniGrid®

- O11** 10AX 1 Gang 2 Way Plate Switch
- O12** 10AX 2 Gang 2 Way Plate Switch
- O13** 10AX 3 Gang 2 Way Plate Switch
- O19** 10AX 4 Gang 2 Way Plate Switch
- 105** 10AX 6 Gang 2 Way Plate Switch
- O25** 10AX 1 Gang Intermediate Plate Switch

**Standards:** BS EN 60669-1

**Back Box Depth (mm):** O11 O12 O13 O25: 16 105 O19: 25 **Cable Size (mm²):** 4 x 1.5 or 2 x 2.5

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **O11** - Product No. **BK** - Insert Colour

**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass,

**PN** Pearl Nickel, **BR** Polished Brass, **SC** Satin Chrome.

**CLICK®**

sales@scolmore.com | Call: 01827 63454 | scolmore.com





**MINIGRID®**

Switch modules interchangeable with MiniGrid® Modules  
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

#### Ingot Plates Switches - MiniGrid®

- 411** 10AX Ingot 1 Gang 2 Way Plate Switch
- 412** 10AX Ingot 2 Gang 2 Way Plate Switch
- 413** 10AX Ingot 3 Gang 2 Way Plate Switch
- 414** 10AX Ingot 4 Gang 2 Way Plate Switch
- 416** 10AX Ingot 6 Gang 2 Way Plate Switch
- 425** 10AX Ingot 1 Gang Intermediate Plate Switch

**Standards:** BS EN 60669-1

**Back Box Depth (mm):** **411 412 413 425:** 16 **414 416:** 25

**Cable Size (mm²):** 4 x 1.5 or 2 x 2.5

**Dimensions (mm):** **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour

**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,

**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).



**MINIGRID®**

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

#### Unfurnished Plates - MiniGrid®

- 401** 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
  - 402** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
  - 403** 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
  - 404** 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
  - 406** 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
  - 426** 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
  - 432** 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- Please note 432 is not available in BN, BR, PN or SB. See range of MiniGrid® Modules in the MiniGrid® section

#### Architrave Switch Plates (Unfurnished)

- 471** 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- 472** 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

**Standards:** BS 5733

**Back Box Depth (mm):** Dependent On Modules Fitted **471 472:** 25

**Dimensions (mm):** **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D) **471:** 35 (W) x 89 (H) x 8 (D) **472:** 35 (W) x 149 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour


**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,

**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).






The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. GR100 yokes are required to mount the MiniGrid® modules into prior to assembling the frontplate.



512

#### 2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

**512** 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures  
2 x GR100 Yokes required, see page C9

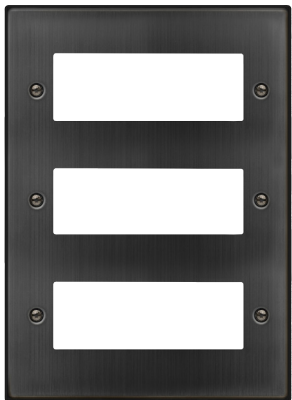

518

#### 3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®


**518** 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures  
3 x GR100 Yokes required, see page C9

#### MINIGRID®

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

**Standards:** BS 5733  
**Back Box Depth (mm):** 47  
**Dimensions (mm):** **512:** 146 (W) x 146 (H) x 8 (D) **518:** 146 (W) x 227 (H) x 8 (D)


**Understanding the code:** Please note: Supplied with both black & white gaskets (AB, BN, MB & BZ supplied with black gaskets only).  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No.  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass, **SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

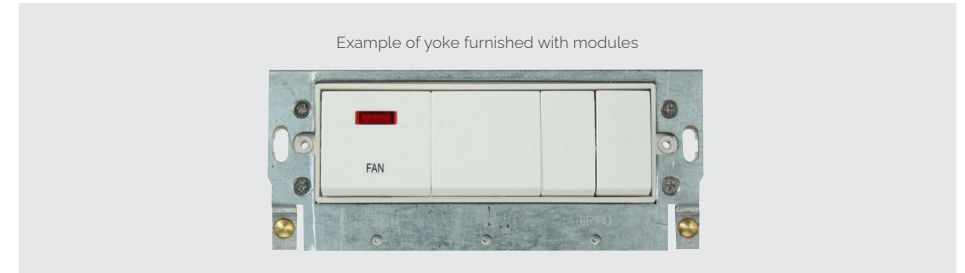

Example of yoke furnished with modules

#### MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

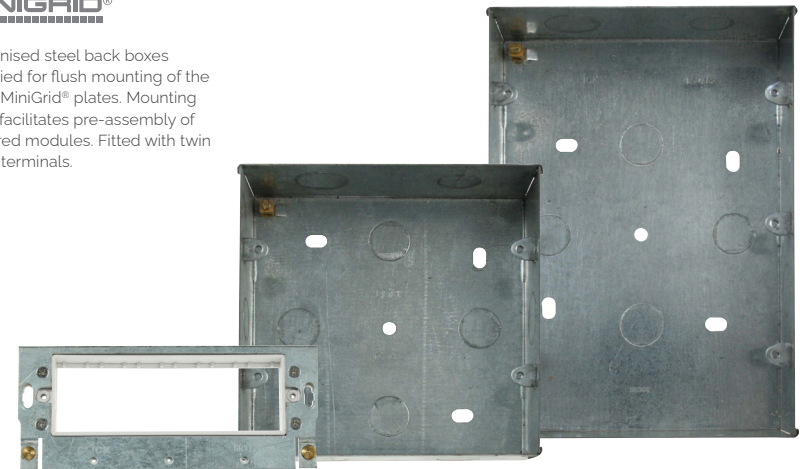

GR100

WA512

WA518

#### Yokes

**GR100BK** MiniGrid® Module Yoke - 6 Apertures - Black  
**GR100PW** MiniGrid® Module Yoke - 6 Apertures - White  
**GR100GY** MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.

#### Galvanised Steel Back Boxes

**WA512** 2 Tier 47mm Deep K.O. Box  
**WA518** 3 Tier 47mm Deep K.O. Box

**Standards:** **512 518:** BS 4662  
**Dimensions (mm):** **GR100:** 129 (W) x 55 (H) x 14 (D) **512:** 137 (W) x 137 (H) x 47 (D) **518:** 137 (W) x 197 (H) x 47 (D)



161



163



164



#### Dimmer Switches (Trailing Edge)

- 161** 1 Gang 2 Way 100W Dimmer Switch
- 162** 2 Gang 2 Way 100W Dimmer Switch
- 163** 3 Gang 2 Way 100W Dimmer Switch
- 164** 4 Gang 2 Way 100W Dimmer Switch

**Standards:** BS EN 60669-1 BS EN 60669-2-1 BS EN 55015 BS EN 61000-3-2  
**Type:** Trailing Edge  
**Back Box Depth (mm):** 25 **Cable Size (mm²):** 2 x 1.5  
**Dimensions (mm):** **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: Supplied with both black & white gaskets (AB, BN, MB & BZ supplied with black gaskets only).  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No.  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

#### Dimmer Modules

- MD9001** 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010** 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

#### Dimmer M10 Nut Runner

- SP900** Dimmer M10 Nut Runner Tool


Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



140PL




152PL

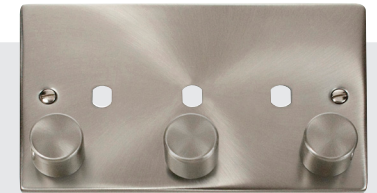

153PL



185

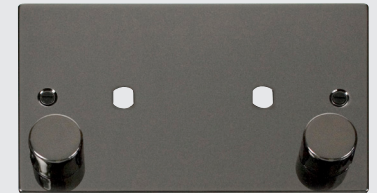

186

Dimmer Modules supplied separately


#### Dimmer Mounting Unfurnished Plates

- 140PL** 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL** 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL** 2 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL** 2 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185** 2 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186** 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

**Standards:** BS 5733  
**Back Box Depth (mm):** 25 (35 Flat Plate)  
**Dimensions (mm):** **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: Supplied with both black & white gaskets (AB, BN, MB & BZ supplied with black gaskets only).  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No.  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).



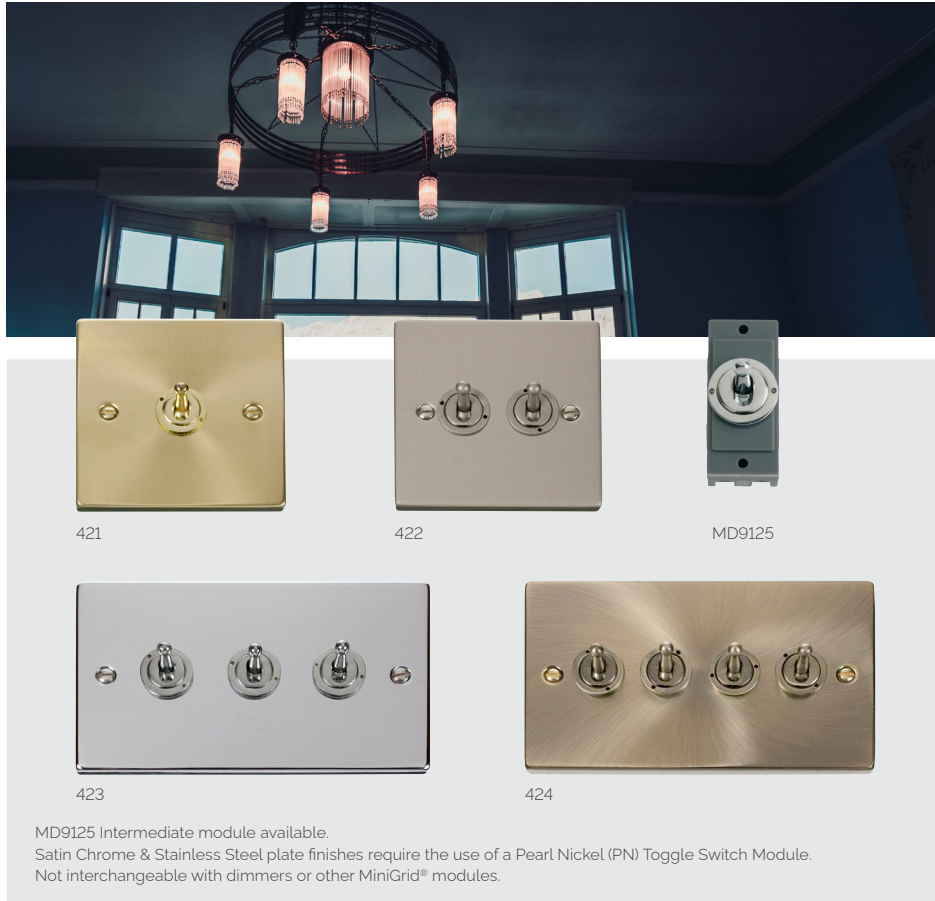

421

422

MD9125

423

424

MD9125 Intermediate module available.

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.  
Not interchangeable with dimmers or other MiniGrid® modules.

#### Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

#### 10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel
- MD9125MB Intermediate Toggle Switch Module - Matt Black
- MD9125BZ Intermediate Toggle Switch Module - Matt Bronze

Standards: BS EN 60669-1

Back Box Depth (mm): 25 Cable Size (mm<sup>2</sup>): 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: Supplied with both black & white gaskets (AB, BN, MB & BZ supplied with black gaskets only).

VP - Plate Style BN - Plate Finish 011 - Product No.

AB Antique Brass, BN Black Nickel, CH Polished Chrome, SS Stainless Steel, SB Satin Brass, PN Pearl Nickel, BR Polished Brass,


SC Satin Chrome, MB Matt Black (Ingot Only), BZ Matt Bronze (Ingot Only).

## Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 10 different Deco® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



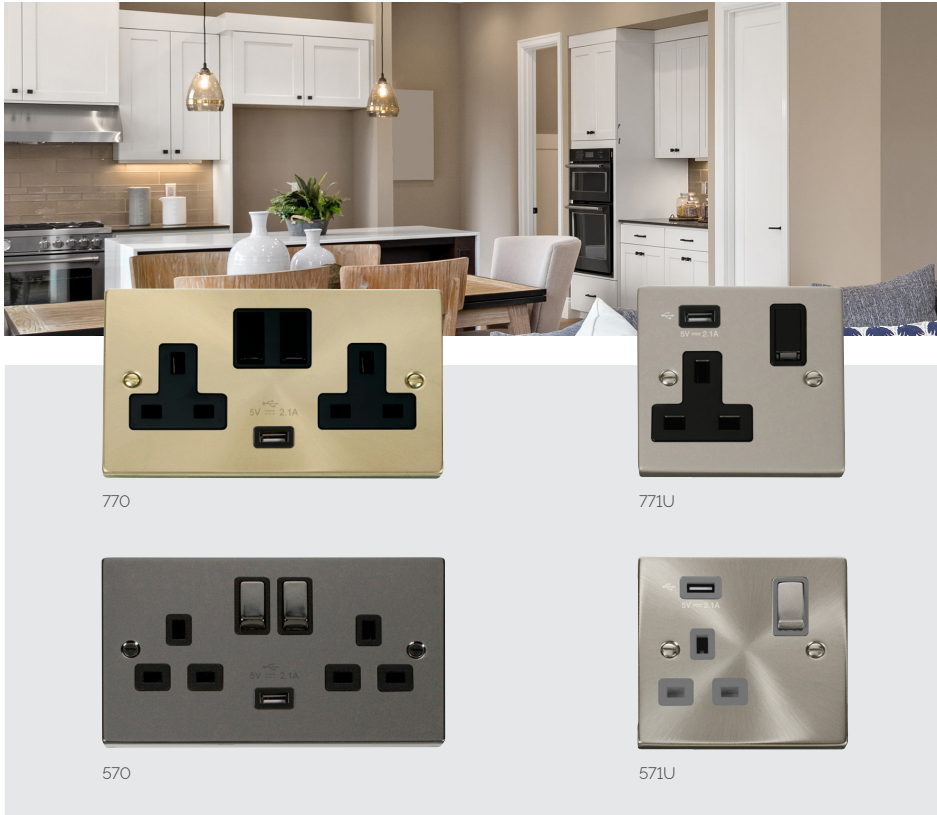

#### Switched Sockets With USB Outlet

**770** 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)  
Limited finishes available.

**771U** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)  
Limited finishes available.


#### Ingot Switched Sockets With USB Outlet

**570** 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)  
Limited finishes available.

**571U** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)  
Limited finishes available.

**Standards:** BS 1363-2: 2016 •A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **O11** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only).

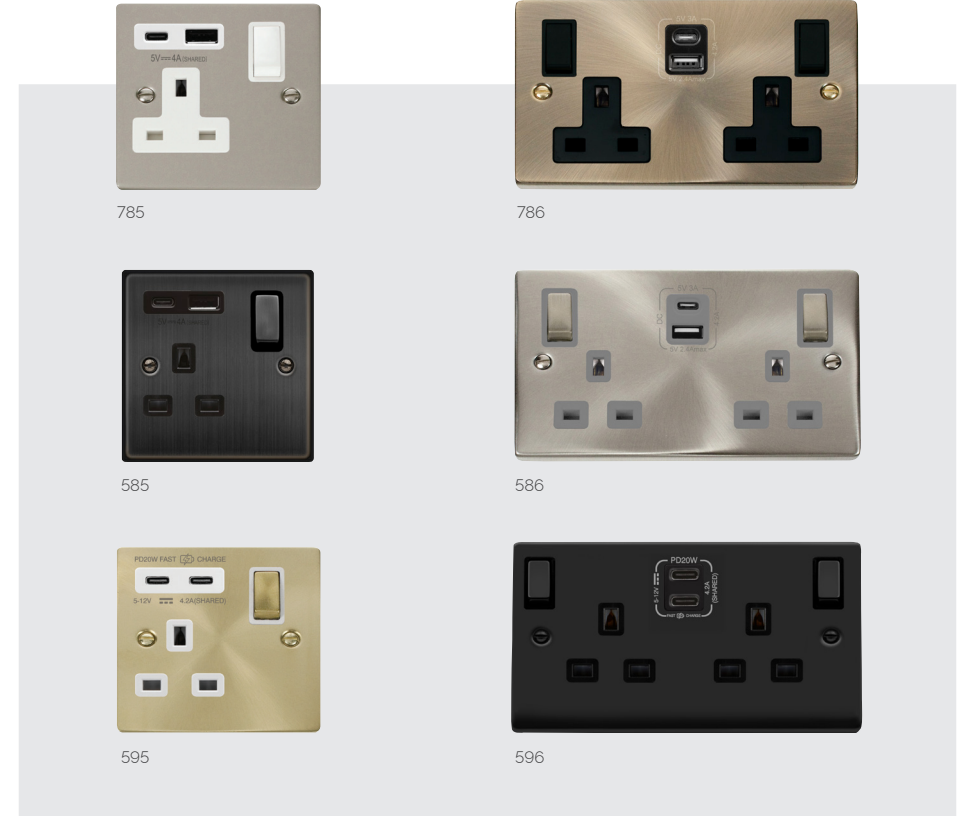

#### Switched Sockets With Twin USB Outlets

**780** 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

**785** 13A 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)

**786** 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

**795** 13A 1 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets (Twin Earth)

**796** 13A 2 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets (Twin Earth)  
Limited finishes available.

#### Ingot Switched Sockets With Twin USB Outlets

**580** 13A Ingot 2 Gang Switched Sockets With Twin 2.1A USB Outlets (4.2A) (Twin Earth)  
Limited finishes available.

**585** 13A Ingot 1 Gang Switched Socket Outlet With Type A & C USB (4A) Outlets (Twin Earth)

**586** 13A Ingot 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

**595** 13A Ingot 1 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets (Twin Earth)

**596** 13A Ingot 2 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets (Twin Earth)

**Standards:** BS 1363-2: 2016 •A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **O11** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

C16



#### Switched Socket Outlets

- 035** 13A 1 Gang DP Switched Socket Outlet  
**036** 13A 2 Gang DP Switched Socket (Twin Earth)

#### Ingot Switched Socket Outlets

- 535** 13A Ingot 1 Gang DP Switched Socket Outlet  
**536** 13A Ingot 2 Gang DP Switched Socket (Twin Earth)



#### Round Pin Socket Outlets

- 038** 5A Round Pin Socket  
**039** 2A Round Pin Socket

**Standards:** BS 1363-2 **038 039:** BS 546

**Back Box Depth (mm):** 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4 **038:** 3 x 15 **039:** 4 x 15 or 3 x 2.5

**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour

**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,

**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

C17



#### Unswitched Safety Shutter Socket Outlets

- 530** 13A 1 Gang Unswitched Socket Outlet (Twin Earth)  
**532** 13A 2 Gang Unswitched Socket Outlet (Twin Earth)  
 Limited finishes available.



Safety Shuttered Sockets listed are only available for sale in the Republic of Ireland.

#### Ingot Switched Safety Shutter Socket Outlets

- 1535** 13A Ingot 1 Gang DP Switched Socket Outlet  
**1536** 13A Ingot 2 Gang DP Switched Socket Outlet (Twin Earth)  
**1836** 13A Ingot 2 Gang DP Outboard Switched Socket Outlet (Twin Earth)

**Standards:** BS 1363-2

**Back Box Depth (mm):** 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4


**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour

**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,

**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

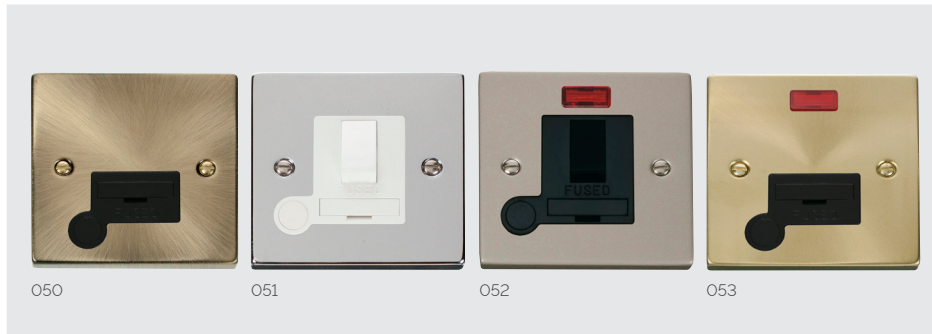

**Fused Connection Units With Optional Flex Outlet**

- 050** 13A Fused Connection Unit  
**051** 13A DP Switched Fused Connection Unit  
**052** 13A DP Switched Fused Connection Unit With Neon  
**053** 13A Fused Connection Unit With Neon



**Fused Connection Units Without Flex Outlet**

- 650** 13A Fused Connection Unit  
**651** 13A DP Switched Fused Connection Unit  
**652** 13A DP Switched Fused Connection Unit With Neon  
**653** 13A Fused Connection Unit With Neon


**Standards:** BS 1363-4 BS 1362  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass,  
**PN** Pearl Nickel, **BR** Polished Brass, **SC** Satin Chrome.



**Ingot Fused Connection Units With Optional Flex Outlet**

- 550** 13A Ingot Fused Connection Unit  
**551** 13A Ingot DP Switched Fused Connection Unit  
**552** 13A Ingot DP Switched Fused Connection Unit With Neon  
**553** 13A Ingot Fused Connection Unit With Neon

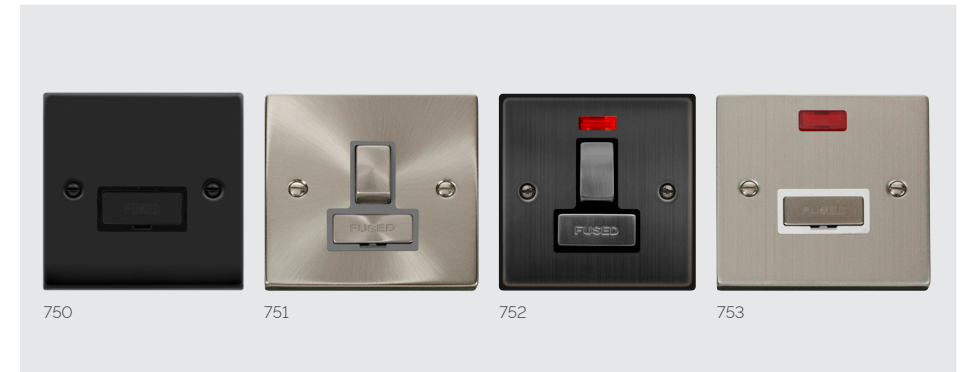

**Ingot Fused Connection Units Without Flex Outlet**

- 750** 13A Ingot Fused Connection Unit  
**751** 13A Ingot DP Switched Fused Connection Unit  
**752** 13A Ingot DP Switched Fused Connection Unit With Neon  
**753** 13A Ingot Fused Connection Unit With Neon

**Standards:** BS 1362  
**Back Box Depth (mm):** 25 **Cable Size (mm<sup>2</sup>):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).



3 Pole and 20A DP Switches are Non-Modular.



022

023

**20A Control Switches With Optional Flex Outlet**

- 022 20A DP Switch
- 023 20A DP Switch With Neon



622

623

**20A Control Switches Without Flex Outlet**

- 622 20A DP Switch
- 623 20A DP Switch With Neon



020

**Fan Isolation Switch**

- 020 10A 3 Pole Fan Isolation Switch

**Standards:** BS EN 60669-1 **020:** BS EN 60669-2-4  
**Back Box Depth (mm):** 25 **020:** 16 **Cable Size (mm²):** 3 x 2.5 **020:** 4 x 1.5 or 2 x 2.5  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass,  
**PN** Pearl Nickel, **BR** Polished Brass, **SC** Satin Chrome.

3 Pole and 20A DP Switches are Non-Modular.



522

523

**Ingot 20A Control Switches With Optional Flex Outlet**

- 522 20A Ingot DP Switch
- 523 20A Ingot DP Switch With Neon



722

723

**Ingot 20A Control Switches Without Flex Outlet**

- 722 20A Ingot DP Switch
- 723 20A Ingot DP Switch With Neon



520

**Ingot Fan Isolation Switch**

- 520 10A Ingot 3 Pole Fan Isolation Plate Switch

**Standards:** BS EN 60669-1 **520:** BS EN 60669-2-4  
**Back Box Depth (mm):** 25 **520:** 16 **Cable Size (mm²):** 3 x 2.5 **520:** 4 x 1.5 or 2 x 2.5  
**Dimensions (mm):** 88 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

C22



#### 50A Switches And Socket Outlets

- 200** 50A 1 Gang DP Switch
- 201** 50A 1 Gang DP Switch With Neon
  
- 202** 50A 2 Gang (Vertical) DP Switch
- 203** 50A 2 Gang (Vertical) DP Switch With Neon
  
- 204** 50A 2 Gang DP Switch With 13A DP Switched Socket
- 205** 50A 2 Gang DP Switch With 13A DP Switched Socket & Neons

**Standards:** BS EN 60669-1 **204 205:** BS 4177

**Back Box Depth (mm):** 35 **Cable Size (mm²):** 1 x 16

**Dimensions (mm):** **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D) **202 203:** 88 (W) x 146 (H) x 8 (D)


**Understanding the code:** Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **O11** - Product No. **BK** - Insert Colour

**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass,

**PN** Pearl Nickel, **BR** Polished Brass, **SC** Satin Chrome.

C23

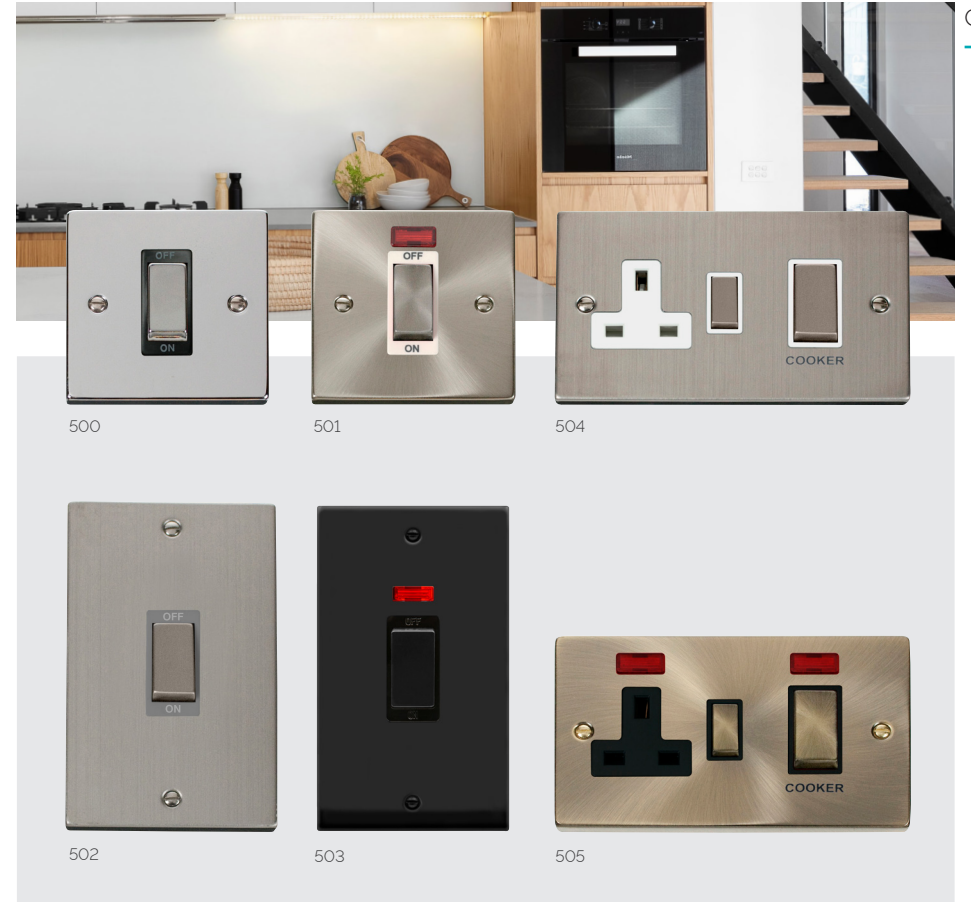

#### Ingot 50A Switches And Socket Outlets

- 500** 50A Ingot 1 Gang DP Switch
- 501** 50A Ingot 1 Gang DP Switch With Neon
  
- 502** 50A Ingot 2 Gang (Vertical) DP Switch
- 503** 50A Ingot 2 Gang (Vertical) DP Switch With Neon
  
- 504** 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505** 50A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons  
Limited finishes available.

**Standards:** BS EN 60669-1 **504 505:** BS 4177

**Back Box Depth (mm):** 35 **Cable Size (mm²):** 1 x 16

**Dimensions (mm):** **1 Gang:** 88 (W) x 88 (H) x 8 (D) **2 Gang:** 146 (W) x 88 (H) x 8 (D) **502 503:** 88 (W) x 146 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.

**VP** - Plate Style **BN** - Plate Finish **O11** - Product No. **BK** - Insert Colour

**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,

**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

C24



660

#### Lockable Switches

**660** 20A DP Key Lockable Switch



655

#### Ingot Lockable Socket Outlets

**655** 13A Ingot 1 Gang DP Key Lockable Socket With Neon



675

#### Lockable Socket Outlets

**675** 13A 1 Gang DP Key Lockable Socket With Neon

Two keys provided (Spare keys available: SP660).

**Standards:** 655 675: BS EN 60669-1 BS 1363-2 660: BS EN 60669-1  
**Back Box Depth (mm):** 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).

C25



024

#### 20A DP Sink/Bath Switch

**024** 20A DP Sink/Bath Switch With Neon



100

#### Dual Voltage Shaver Socket Outlet

**100** 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010, making it safe for use in bathrooms. This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.




060

#### Blank Plates

**060** 1 Gang Blank Plate

**061** 2 Gang Blank Plate



061

**Standards:** 024: BS EN 60669-1 100: BS EN IEC 61558-1 BS EN 61558-2-5  
**Back Box Depth (mm):** 024: 25 100: 47 **Cable Size (mm²):** 024: 3 x 2.5 100: 2 x 1.5 or 1 x 2.5  
**Dimensions (mm):** 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 100: 88 (W) x 146 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
**VP** - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour  
**AB** Antique Brass, **BN** Black Nickel, **CH** Polished Chrome, **SS** Stainless Steel, **SB** Satin Brass, **PN** Pearl Nickel, **BR** Polished Brass,  
**SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BZ** Matt Bronze (Ingot Only).



# TV, Telephone & Satellite

The following pages contain details of Deco® products designed to deal with handling media transfer through telephone, computer, TV or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from the New Media™ section of this catalogue.

## Telephone Outlets



### RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

### Telephone Outlets

120 Single Telephone Outlet - Master

121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary

126 Twin Telephone Outlet - Secondary



120 | 125



121 | 126

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth (mm): 16 115: 35  
Termination Type: IDC 115: Screw  
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
VP - Plate Style BN - Plate Finish O11 - Product No. BK - Insert Colour  
AB Antique Brass, BN Black Nickel, CH Polished Chrome, SS Stainless Steel, SB Satin Brass, PN Pearl Nickel, BR Polished Brass,  
SC Satin Chrome, MB Matt Black (Ingot Only), BZ Matt Bronze (Ingot Only).



065 | 158



066 | 159



156



157 | 170



#### Non-isolated Coaxial Outlets (Unshielded)

- 065 Single Coaxial Outlet
- 066 Twin Coaxial Outlet

#### Isolated Coaxial Outlets (Unshielded)

- 158 Single Isolated Coaxial Outlet
- 159 Twin Isolated Coaxial Outlet

#### Satellite Outlets (Unshielded)

- 156 Non-isolated Single Satellite Outlet
- 157 Isolated Satellite & Isolated Coaxial Outlet
- 170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth (mm): 16  
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

**Understanding the code:** Please note: AB, BN, MB & BZ are only available with Black inserts. SC & SS Ingot are available with Grey Inserts.  
VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour  
AB Antique Brass, BN Black Nickel, CH Polished Chrome, SS Stainless Steel, SB Satin Brass, PN Pearl Nickel, BR Polished Brass,  
SC Satin Chrome, MB Matt Black (Ingot Only), BZ Matt Bronze (Ingot Only).



MP603



MP606

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

#### Half New Media Semi-Modular Part Furnished Plate

**MP603** Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures

Available in Chrome (CH), Satin Chrome (SC) & Satin Brass (SB). Requires MP520 flush back box.

#### 2 Tier Semi-Modular Unfurnished Plates

**MP606** Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures


Available in Chrome (CH), Satin Chrome (SC) & Matt Black (MB). Requires MP525 or MP535 flush back box.



310



311

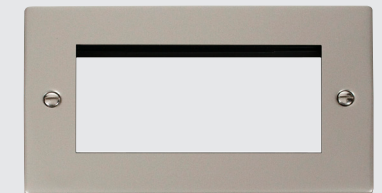

312

new media™

See our dedicated New Media™ section for more information on the range of New Media™ modules available. For the complete range of semi-modular unfurnished plates see page K7.

#### Unfurnished Plates - New Media™

- 310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733 603 606: BS 1363-2  
Back Box Depth (mm): Dependent On Modules Fitted Cable Size (mm²): 603 606: 3 x 2.5 or 2 x 4  
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 603: 250 (W) x 86 (H) x 8 (D) 606: 250 (W) x 216 (H) x 8 (D)

**Understanding the code:**  
VP - Plate Style BN - Plate Finish 011 - Product No.  
AB Antique Brass, BN Black Nickel, CH Polished Chrome, SS Stainless Steel, SB Satin Brass, PN Pearl Nickel, BR Polished Brass,  
SC Satin Chrome, MB Matt Black (Ingot Only), BZ Matt Bronze (Ingot Only).



VPSC604BK



VPCH684WH

Product is supplied with 2 x 13A DP switched sockets. Back box WA512 required.

## New Media Semi-Modular Part Furnished Plates

|                  |                                                                                                                     |
|------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>VPSC604BK</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures                                    |
| <b>VPSC604WH</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures                                    |
| <b>VPCH604BK</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures                                    |
| <b>VPCH604WH</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures                                    |
| <b>VPSS604BK</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures                                    |
| <b>VPSS604WH</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 4 Apertures                                    |
| <b>VPSC684BK</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures |
| <b>VPSC684WH</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures |
| <b>VPCH684BK</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures |
| <b>VPCH684WH</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures |
| <b>VPSS684BK</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures |
| <b>VPSS684WH</b> | New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets With Type A & C USB (4.2A) Outlets & 4 Apertures |

**Standards:** 604: BS 1363-2 684: BS 1363-2 EN IEC 62368-1 EN IEC 62368-3 EN IEC 62680-1-3  
**Back Box Depth (mm):** WA512 (47) **Cable Size (mm²):** 3 x 2.5 or 2 x 4  
**Dimensions (mm):** 148 (W) x 148 (H) x 8 (D)


**Understanding the code:**  
**VP** - Plate Style **SC** - Plate Finish **604** - Product No. **BK** - Insert Finish.  
**CH** Polished Chrome, **SC** Satin Chrome, **SS** Stainless Steel.



WA093



WA095



WA370




WA571



WA572



SP650



SP675

## Galvanised Steel Back Boxes

**WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box

**WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box

**WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box

**WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box

**WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box

**WA370** 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)

**WA375** 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

**WA571** 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

**WA572** 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

## Longer Fixing Screws

**SP650** Standard M3.5 Dia. 50mm Long Screws (Bag 100)

**SP675** Standard M3.5 Dia. 75mm Long Screws (Bag 100)


**SP625** Standard M3.5 Security Screw 25mm Long (Bag 100)  
Require 2mm security allen key/driver.

essentials™

For the complete range of back boxes see Essentials™ page N4.  
For the complete range of longer fixing screws see Essentials™ page N9.

**Understanding the code:**  
Screws available in **BR** Brass, **CH** Chrome, **MB** Matt Black and **BN** Black Nickel finishes.  
Suffix code with preferred finish. Chrome finish may be used with white plate accessories.






WA4247



WA106PBK



WA107P

## FlameGuard® Dry Lining Boxes

|        |                                             |
|--------|---------------------------------------------|
| WA4135 | 1 Gang 35mm Deep FlameGuard® Dry Lining Box |
| WA4147 | 1 Gang 47mm Deep FlameGuard® Dry Lining Box |
| WA4235 | 2 Gang 35mm Deep FlameGuard® Dry Lining Box |
| WA4247 | 2 Gang 47mm Deep FlameGuard® Dry Lining Box |

## Dry Lining Boxes (Sprung Fixing Lugs)

|         |                                 |
|---------|---------------------------------|
| WA087SF | 1 Gang 35mm Deep Dry Lining Box |
| WA088SF | 2 Gang 35mm Deep Dry Lining Box |
| WA106SF | 1 Gang 47mm Deep Dry Lining Box |
| WA107SF | 2 Gang 47mm Deep Dry Lining Box |

## Dry Lining Boxes

|          |                                        |
|----------|----------------------------------------|
| WA087P   | 1 Gang 35mm Deep Dry Lining Box        |
| WA087PBK | 1 Gang 35mm Deep Dry Lining Box        |
| WA088P   | 2 Gang 35mm Deep Dry Lining Box        |
| WA088PBK | 2 Gang 35mm Deep Dry Lining Box        |
| WA106P   | 1 Gang 47mm Deep Dry Lining Box        |
| WA106PBK | 1 Gang 47mm Deep Dry Lining Box        |
| WA107P   | 2 Gang 47mm Deep Dry Lining Box        |
| WA107PBK | 2 Gang 47mm Deep Dry Lining Box        |
| WA108P   | Round Ceiling 34mm Deep Dry Lining Box |

## Spacer Gaskets

|         |                                   |
|---------|-----------------------------------|
| VP095BK | 1 Gang 10mm Spacer Gasket - Black |
| VP095GY | 1 Gang 10mm Spacer Gasket - Grey  |
| VP095WH | 1 Gang 10mm Spacer Gasket - White |
| VP096BK | 2 Gang 10mm Spacer Gasket - Black |
| VP096GY | 2 Gang 10mm Spacer Gasket - Grey  |
| VP096WH | 2 Gang 10mm Spacer Gasket - White |

## Deco® Gaskets

|       |                             |
|-------|-----------------------------|
| SP011 | 1 Gang Deco® Gasket - Black |
| SP012 | 2 Gang Deco® Gasket - Black |
| SP013 | 1 Gang Deco® Gasket - White |
| SP014 | 2 Gang Deco® Gasket - White |
| SP021 | 1 Gang Deco® Gasket - Grey  |
| SP022 | 2 Gang Deco® Gasket - Grey  |

## essentials™

For the complete range of back boxes see Essentials™ page N4.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.